## Assembled

View

## **BLACK BEAR ADDRESS SIGN**


**CUTTING:** Cover an appropriate size area of wood with Transfer Paper (#CARB). Lay the pattern over the transfer paper and transfer each pieces cut lines onto the appropriate thickness of wood by simply tracing with a pen, pencil or stylus (#STY). Cut Numbers **B** from 1/8" thick wood. Cut Arms **D**, Left Paw **E**, Right Paw **F**, Muzzle **G** and Bee **H** from 1/4" thick wood. Cut Body **C** from 1/2" thick wood. Cut Sign **A** from 3/4" thick wood the dimensions shown in Sign **A** Cutting Diagram. Cut a 2" long piece of 16 guage wire for Wire **K**. Using a drill, make a starter hole within each inside area to be cut out. Place blade of jigsaw in hole, cut over to line then around entire area to remove wood. Drill holes as noted. Fill voids and defects in wood using wood filler. Sand wood filler (#WF8) and all surfaces to desired smoothness.


**ASSEMBLY:** (Refer to Assembly Diagram) Center and glue Arms **D**, Right Paw **F**, Left Paw **E**, and Muzzle **G** to locations shown on Body **C**. Glue and insert Wire **K** into hole drilled in Body **C** as shown. Glue and insert opposite end of Wire **K** into hole drilled in Bee **H** as shown. (NOTE: Bend Wire **K** as desired.) Center and glue your address Numbers **B** onto Sign **A** as shown. Center and glue Bear Assembly to top edge of Sign **A**. Center and attach Sawtooth Hanger\* **J** (#SAWH) to backside of Sign **A**, 1" down from top edge.

**PAINTING:** Use Delta brand (or equal quality) acrylic craft paint to paint the different areas as noted or colors of your choice.

**FINISHING:** For maximum protection coat your project with at least two coats of our durable project sealer (#POLYQT). Hang on House in desired location to display.

( ) = Available from The Winfield Collection, 1-800-946-3435

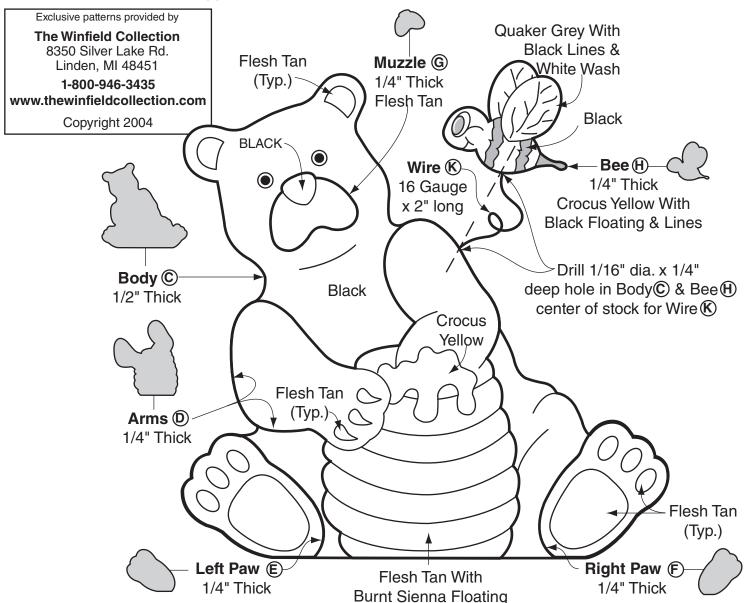

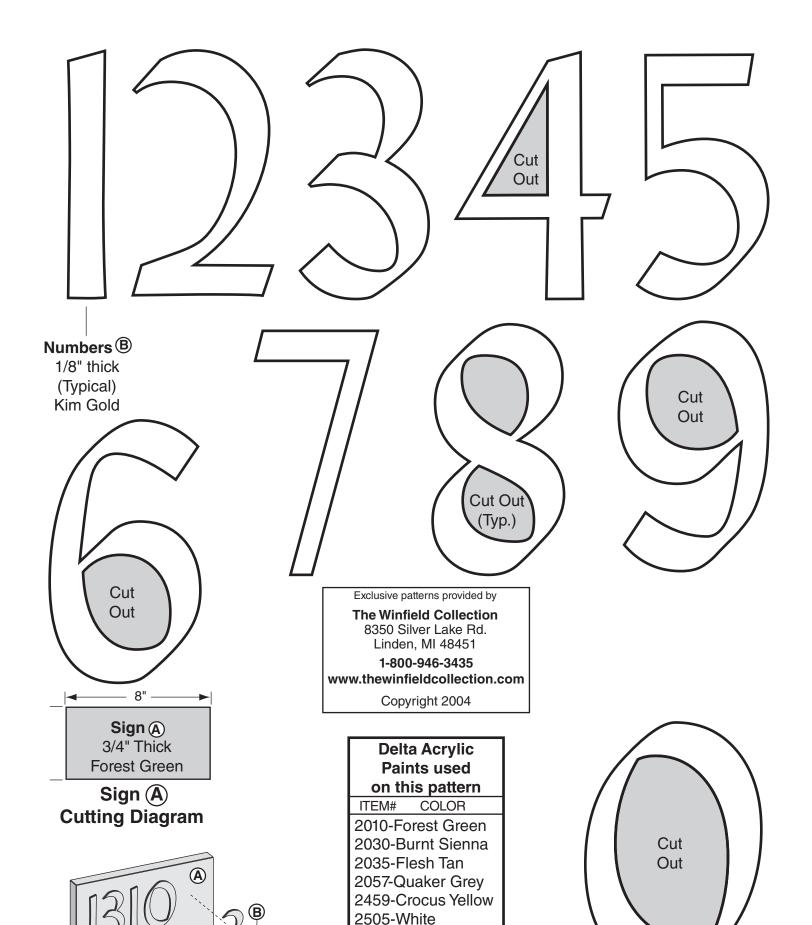

2506-Black 2602-Kim Gold

**Assembly Diagram**